


Etachrom – Long-coupled/Close-coupled Pump

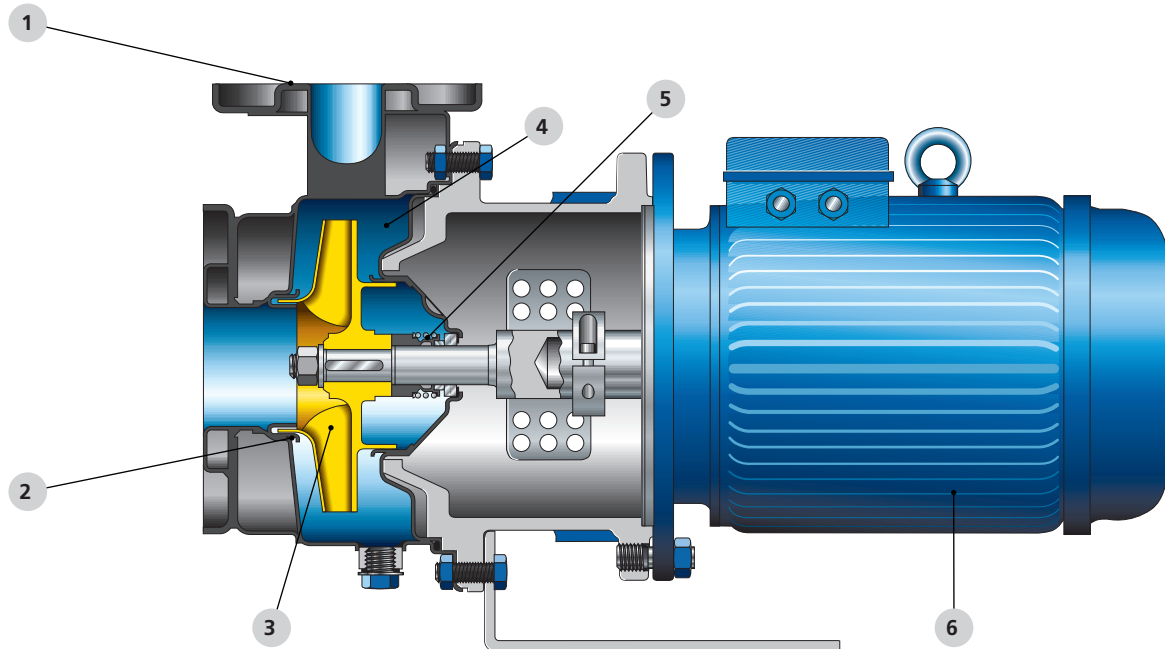

1 Corrosion-resistant

All wetted parts made of stainless steel (1.4571).

2 Resistant and service-friendly

Replaceable casing wear rings.

3 Low energy input

- Optimised hydraulics yield high efficiency.
- Impeller diameters turned down to comply with the duty point save an average of 10% in energy consumption

4 Reliable

Designed up to 12 bar.

5 Long-life, maintenance-free

High-quality standardised mechanical seals to DIN 24960.

6 Robust and safe

KSB-IEC standardised three-phase motor with integrated temperature sensor.

Material:

Stainless steel 1.4571

Automation options:

PumpDrive, PumpExpert, Hyamaster, hyatronic

Technical data:

Max. capacity:	260 m ³ /h
Max. discharge head:	106 m
Fluid temperature:	-30 °C to +110 °C
Max. pump discharge pressure:	12 bar

