


TECHNICAL DATA


DIMENSIONS

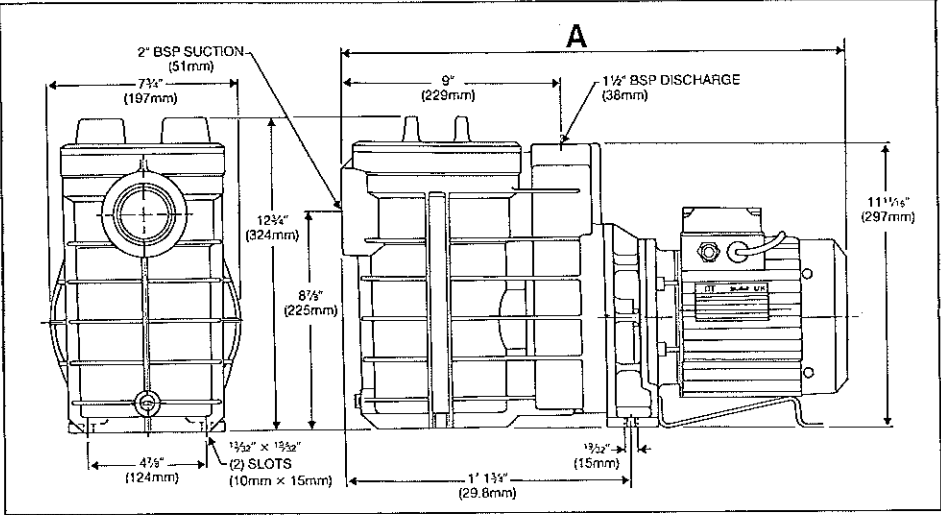


WATTS
HORSE POWER
VOLTS
WEIGHT
LENGTH

Model	KW	HP	1 Phase			3 Phase		
			VOLTS	Kg	'A'	VOLTS	Kg	'A'
J50EC	.25	1/3	220/240V	13	20.9" (533mm)	220/240/380/415V	11	20.9" (533mm)
J75EC	.37	1/2		14			11	
J100EC	.56	3/4		16			12	
J150EC	.75	1		17			15	
J200EC	1.12	1 1/2		18			17	
J250EC	1.5	2		20	(557mm)		19	(557mm)

PERFORMANCE
CURVES:-
220/240V 50Hz

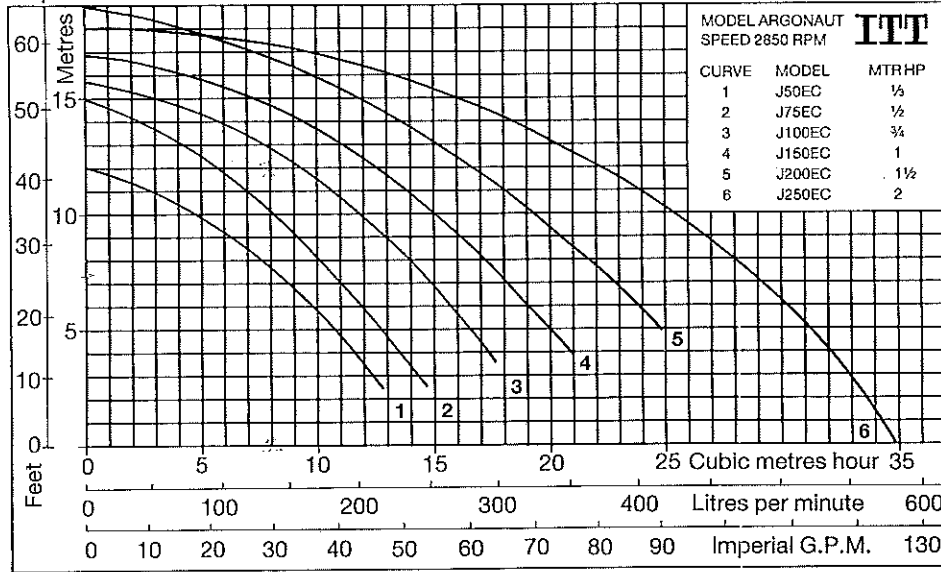

PRIMING CURVE:-
220/240V 50Hz

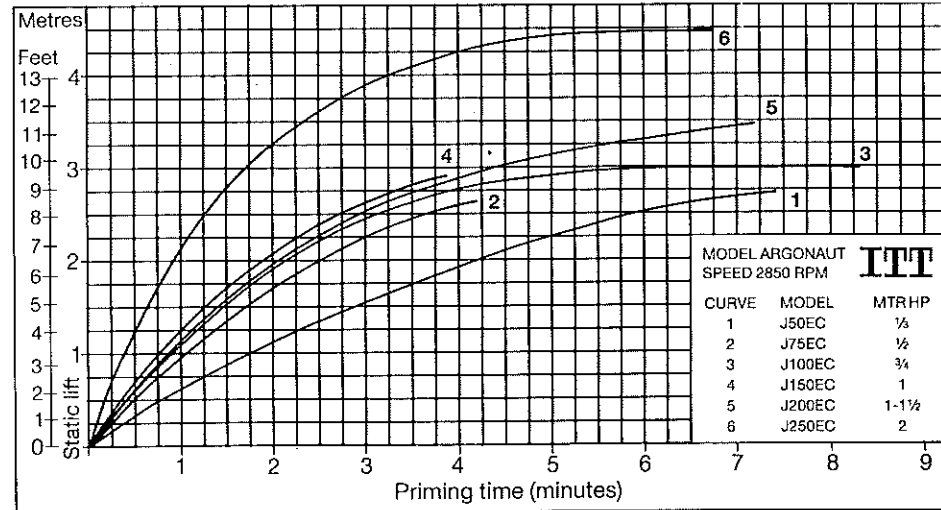

Hoogeindsestraat 5
NL - 5447 PD Rijkevoort
T: +31 (0)485 - 371318
F: +31 (0)485 - 371918
info@pompentechniek.nl
www.pompentechniek.nl

THE ARGONAUT
ENGINEERED FOR QUALITY
AND CAREFREE PERFORMANCE



FEATURES:

- ☆ High pressure, screw on clear cover
- ☆ Extra large strainer basket
- ☆ Heavy duty stainless steel shaft seal
- ☆ 'Noryl' construction — eliminates corrosion
- ☆ Totally enclosed fan cooled motor built to IP55 (hose & dust proof)
- ☆ Self priming



Jabsco
ITT Fluid Technology Corporation

Marlow Pumps, Thaxted Road
Saffron Walden, Essex, England CB10 2UR
Telephone (INT) 44-1799-513893
Fax (INT) 44-1799 513902

The proof is in our warranty... Marlow Pumps



ARGONAUT PUMP

ITT Marlow have created the ultimate pool pump... the pump built for years of dependability, reliability and trouble-free service – you can depend on your Argonaut to be there when you need it. Relax – trust an Argonaut.

the strongest warranty in the industry...

Your Marlow guarantee of quality, reliability and trouble-free service is more than mere words...we back our Argonaut with the strongest warranty in the industry: Pump – 3 full years from date of manufacture, Motor – 2 full years from date of manufacture or 12 months from date of installation. Nobody provides you with a stronger warranty!

It's the only warranty of its kind in the industry...your assurance that when Marlow builds a pool pump...you can depend on it to work hard, long and efficiently. The hallmark of Marlow excellence.

The Argonaut mechanical seal is suitable for use with Chlorine, Bromine, Iodine, Baquacil and sea water (for sea water we recommend seal is flushed with fresh water, if pump is to be stopped for a prolonged period).

The Argonaut is also available in energy-saving two speed models, for high speed (2850 RPM) circulation or low speed (1450 RPM) energy-saving filtration, constant chemical balance and whisper quiet running. (Two speed leaflet available on request).

The Argonaut is completely self priming, up to 3 meters suction lift (with 1½" pipe).


All models are available in 60Hz versions (details available on request).



Hoogeindsestraat 5
NL - 5447 PD Rijkevoort
T: +31 (0)485 - 371318
F: +31 (0)485 - 371918
info@pompechniek.nl
www.pompechniek.nl

THE ARGONAUT

THE POOL PUMP WITH ALL THE MOST SOUGHT AFTER FEATURES

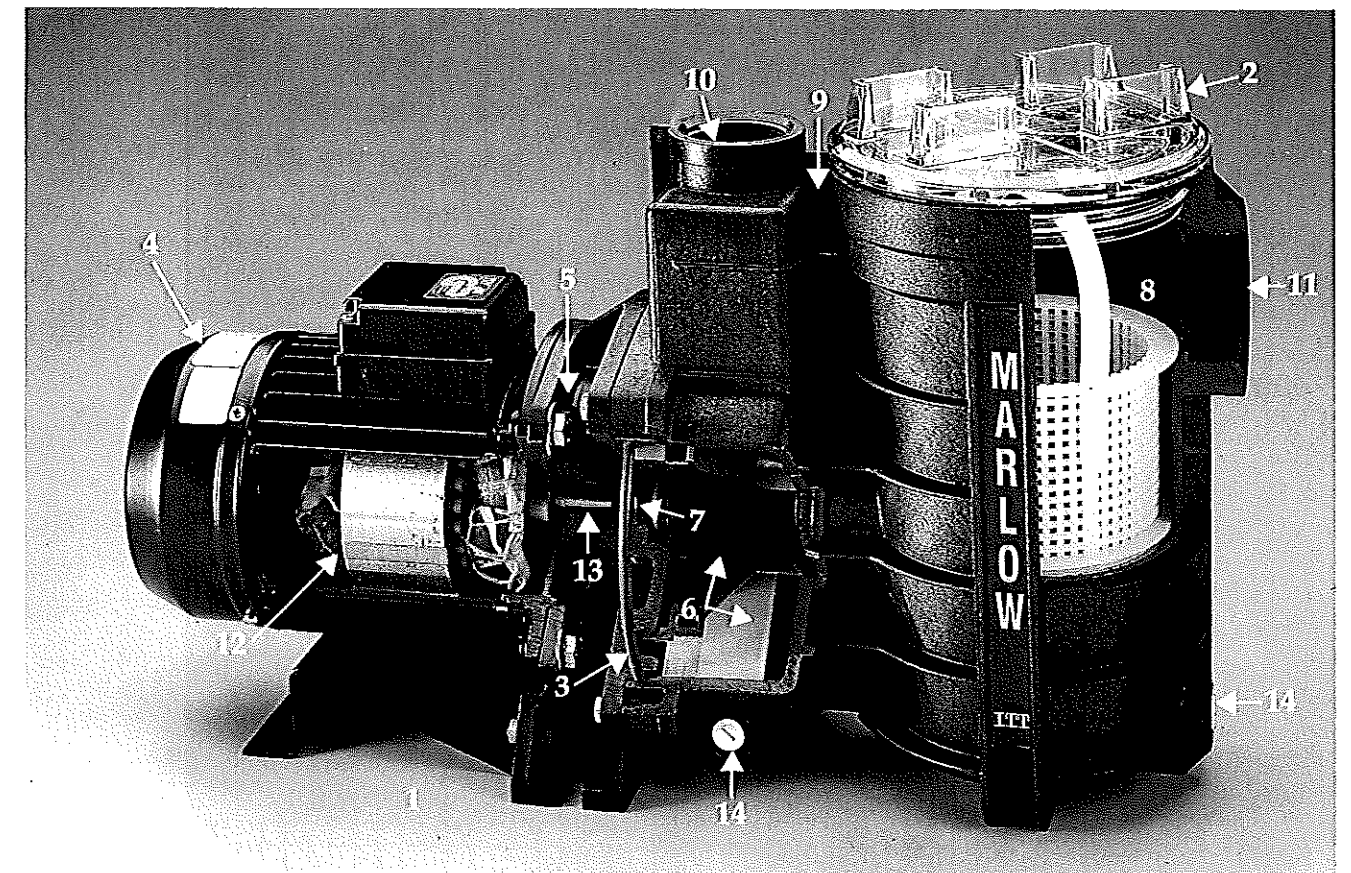

- 1 Modern, compact design.
- 2 Clear, high pressure screw-on cover.
- 3 Leakproof, reusable "O" rings.
- 4 Single and two-speed EnergiSaver motors with TÜV, SEMKO, NEMKO, DEMKO, SETI and CENELEC approvals.
- 5 Maintenance friendly – only 4-bolt design.
- 6 High performance impeller and diffuser.
- 7 Long-life, over-sized industrial seal with stainless steel parts, with dry run capability.
- 8 Extra large strainer basket (1.8 litres). Less frequent cleaning.
- 9 All Noryl construction. 20% glass filled.
- 10 1½ inch discharge.
- 11 2 inch suction.
- 12 IP55 TEFC motor. Jet proof. Dust proof. Thermal overload protection.
- 13 Stainless steel motor shaft.
- 14 Two drain plugs ensure complete drainage of pump.

In the interest of our continuous programme of product improvement we reserve the right to change specifications without prior notice.