

(F)LBC series sewage pumps - cutter



Hoogeindsestraat 5
 NL - 5447 PD Rijkevoort
 Nederland
 T : +31 (0) 485 - 371318
 F : +31 (0) 485 - 371918
 info@pompentechniek.nl
 www.pompentechniek.nl



LBC cutter pumps, portable lightweight and compact cutter design. For residential (raw) sewage and waste water treatment.



- Wear resistant Tungsten carbide steel tips.
- All executed with double mechanical seal in oilbath.
- Free passage up to 27 mm.
- Standard 10 meter cable 230 Volt versions.
- Standard 20 meter cable 400 Volt versions.
- Guide rail systems available.

Technical specifications

Motor housing	cast iron
Pump casing	cast iron
Cutter tips	tungsten carbide
Impeller	cast iron
Motorshaft	stainless steel
Fixtures	stainless steel
O-rings	NBR rubber
Mechanical seal	double
Motor version	IP 68 Class F
Voltage	1 phase 230 V 50 Hz - 2850 RPM 3 phase 400 V 50 Hz - 2850 RPM

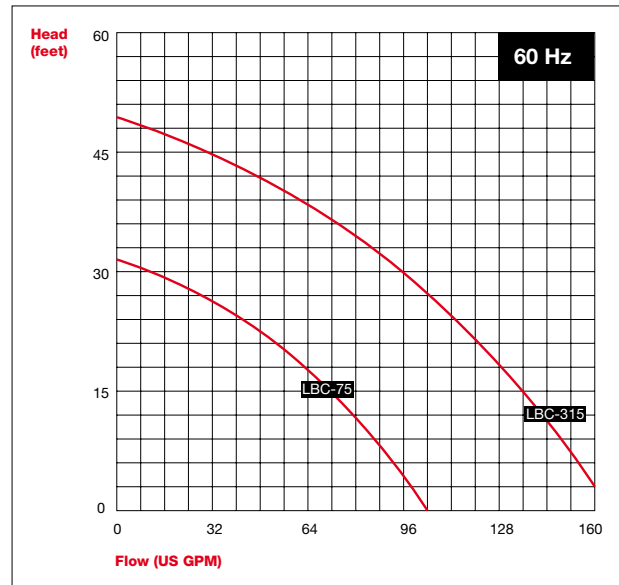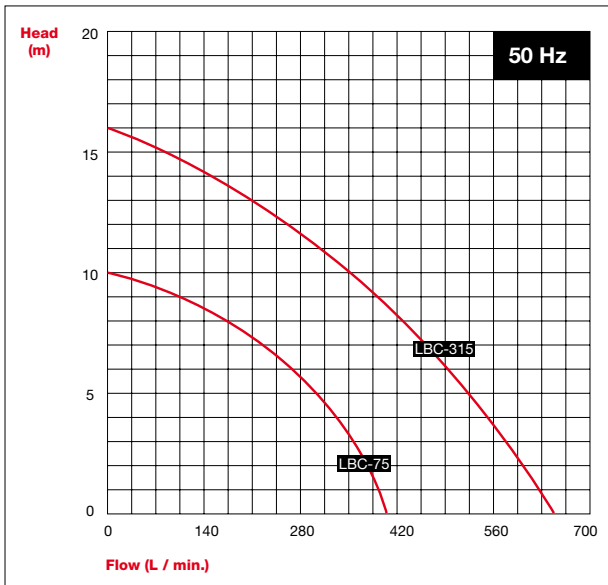

Model	Discharge		Output		Max. Flow & Head				Free passage		Weight		Dimensions		Rated current	
					50 Hz		60 Hz									
	mm	Inch	kW	HP	L/min	M	GPM	Feet	mm	Inch	Kg	Lbs	Height	Diamtr.	230 V	400 V
(F) LBC - 75*	50	2	0,75	1	400	10	106	33	26	1,0	21,5	47	430	300	5	-
(F) LBC - 315 (S)	80	3	1,5	2	650	16	159	52	27	1,1	26,5	58	462	300	10	3,3

(F) LBC = with guide rail system. LBC = without guide rail system. *) Available with floatswitch. (S) = single phase 230 Volt.

AFEC pumps – best return on investment