



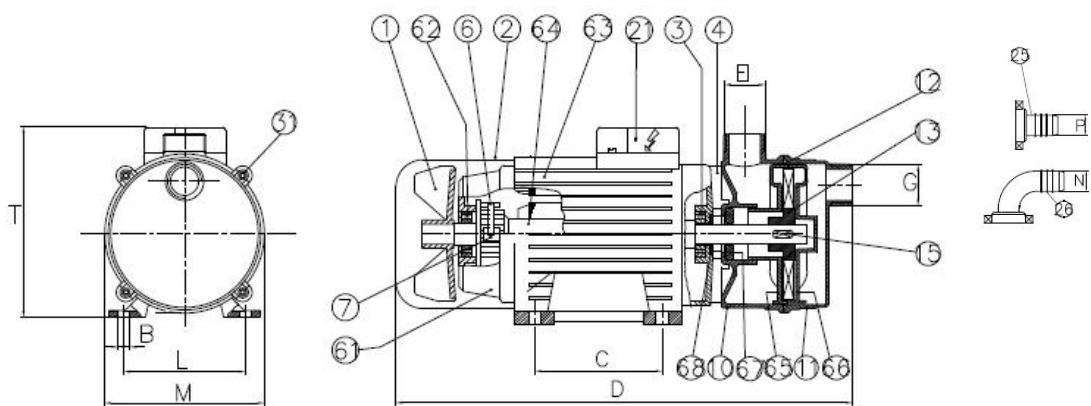

Art.	TIPO TYPE	Volt	HP	Giri/min. R.p.m. Tours/min.	Bocche Hoses Orifices	Adescam. Priming Amorçage (m)	Portata - Capacity Débit (Lt./min.)			Corrente - Current Intensité (A)			LeqA (dB)
							1 m	5 m	10 m	1 m	5 m	10 m	
521	ECC 12/25	12	0.6	1500	1" M	6	55	42	22	28	30	34	74
522	ECC 24/25	24	0.6	1600	1" M	6	55	45	30	15	17	18	75

Caratteristiche riferite al funzionamento con acqua -  
Performances referred to operation with water -  
Caracteristiques référées au fonctionnement avec eau

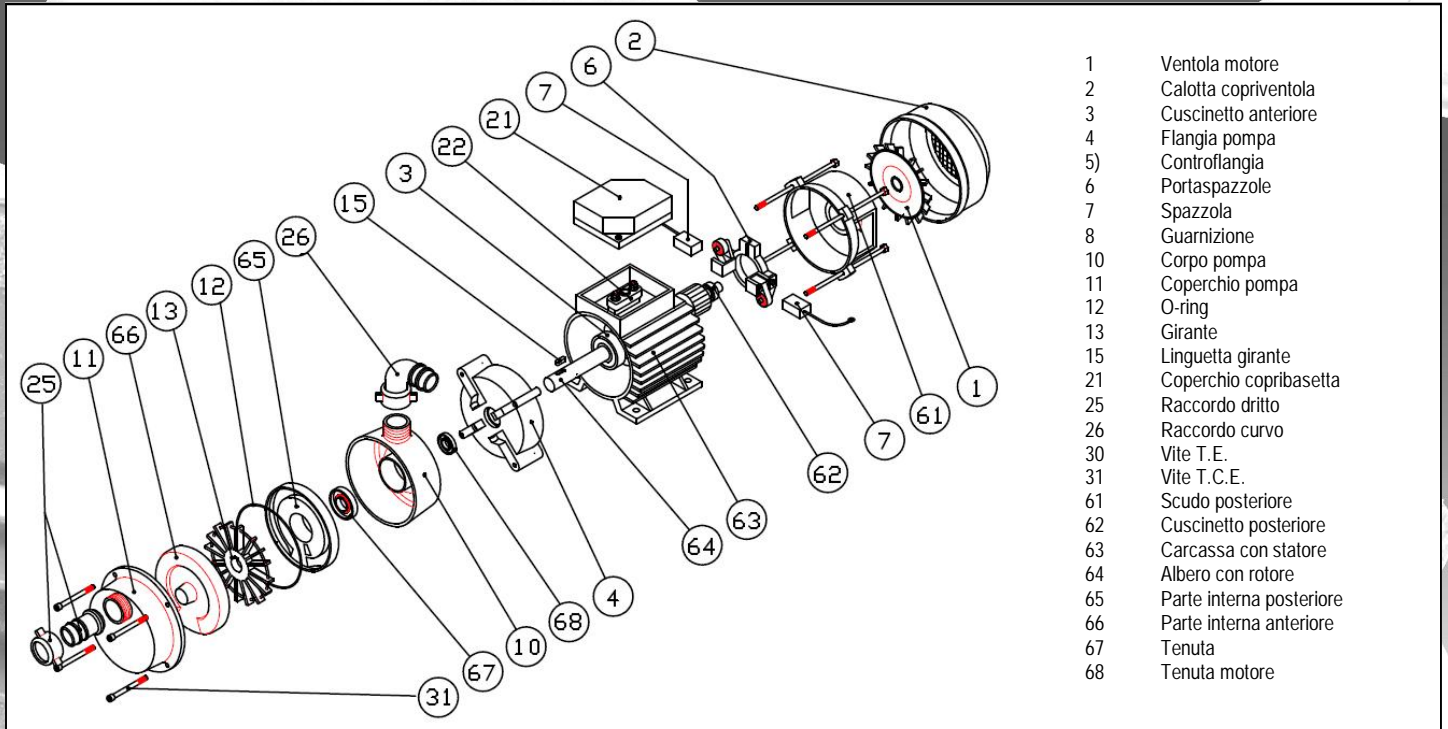

dimensioni - dimensions

Tipo	B	C	D	E G	L	M	N P	T	kg
ECC 12/25	7	90	343	1"	112	140	25	172	9.2
ECC 24/25	7	90	343	1"	112	140	25	172	9.2

Ci riserviamo la facoltà di apportare modifiche senza obbligo di preavviso - We reserve the right to make modifications without prior notice  
Sous réserve de modifications sans avis préalable