


NEMO® BP Specificaties

NEMO® BP

in block construction design
with directly flanged drive or as
NEMO® SP with bearing housing
and drive shaft (no fig.)

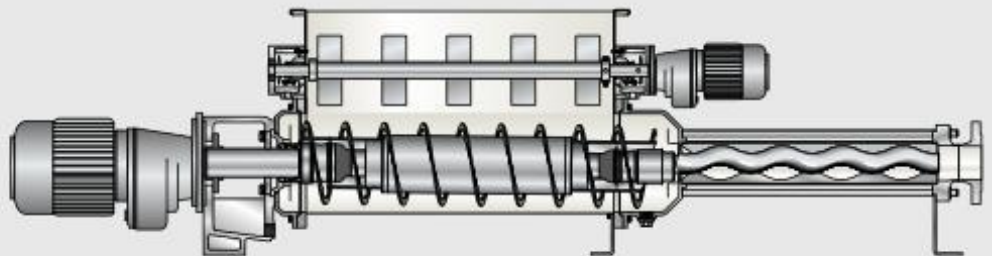

Performance

Capacities up to 200 m³/h (880 gpm). Pressures up to 48 bar (680 psi).
NEMO® BP/SP available from size NM090.

Range of Applications

Industrial applications in environmental and chemical industries for compact and crumbly media that may have a tendency to bridge.

Description

Housing with integrated bridge breaker, mixing additions, enlarged rectangular hopper and tapered force feed chamber as well as coupling rod with patented, positioned feeding screw for optimal transfer of the medium to the rotor and stator.