


Nemo ® SY

technische specificaties

NEMO® SY

with bearing housing and drive shaft

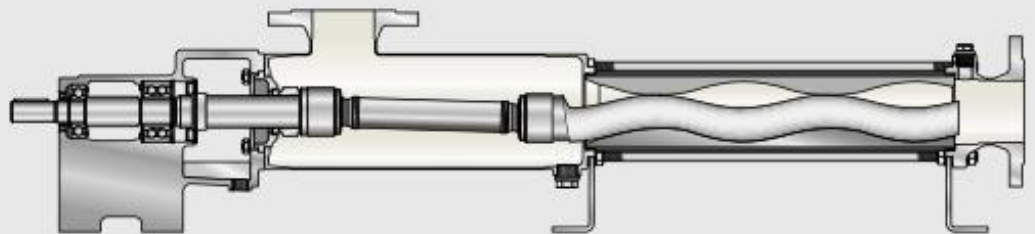

Performance

Capacities up to 500 m³/h (2,200 gpm). Pressures up to 48 bar (680 psi) as standard, up to 240 bar (3,400 psi) as high pressure.

Range of Applications

Industrial applications in environmental, food, oil and chemical industries for low and highly viscous fluids with or without solids.

Description

Design with bearing housing and two-piece shaft allows for universal use of all types of drives and easy and quick servicing of the rotating parts. Four rotor/stator geometries for optimised performance.