

Nemo® BH technische specificaties

The pumps are designed and manufactured according to EHEDG and QHD-standards; they are suitable for CIP and SIP and are constructed in accordance with the US 3-A Sanitary Standards. Three rotor/stator geometries are available for optimal performance*.

Range of Applications


For hygienic applications and optimal cleaning in food, pharmaceutical, cosmetics and chemical/biochemical industries for non-viscous up to highly viscous fluids with or without solids.

Further information

Business Field Food & Pharmaceutical
Brochure NMP - 308

NEMO® BH

Hygienic pump

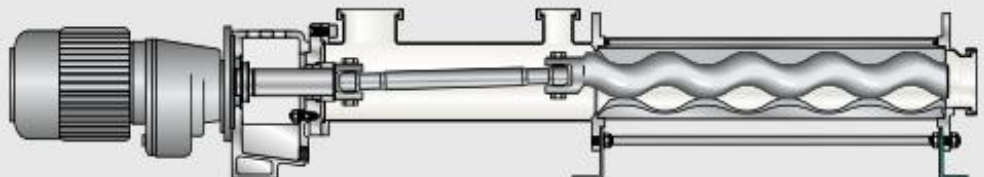

Performance

Capacities up to 200 m³/h (880 gpm). Pressures up to 24 bar (340 psi).

Description

Compact design with directly flanged drive resulting in low initial investment and economical operation and maintenance.