


## Nemo<sup>®</sup> SH technische specificaties

### NEMO<sup>®</sup> SH Hygienic Plus pump

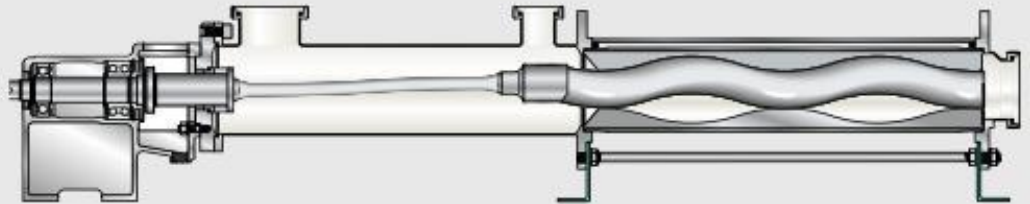

#### Performance

Capacities up to 140 m<sup>3</sup>/h (620 gpm). Pressures up to 24 bar (340 psi).

#### Description

The crevice, wear and maintenance-free flexible rod allows the conveyance of highly sensitive and abrasive products. Design with bearing housing and drive shaft allows for the use of all types of drives.