




Mini

Electrical submersible drainage pump



50 Hz	Mini
Discharge connection	2"
Rated power P_2 [W]	900
Max. power consumption P_1 [W]	1200
Shaft speed [r.p.m.]	2800
Rated current at 115V	11 A
Rated current at 230V	5,2 A
Solids passage	11 x 5 mm
Dimensions A / B	440 / 185 mm
Weight	14,5 kg

Other voltages on request

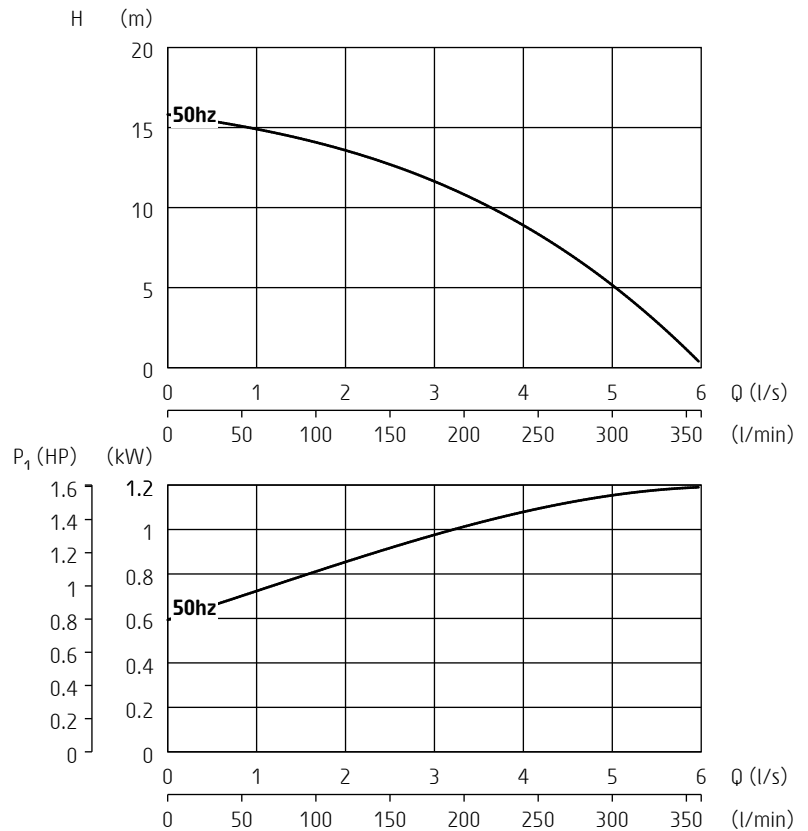

ISO 9906/A

Pump types

Single phase

Classification

Electrical submersible drainage pump

Protection class: IP 68

Electrical motor

1-phase: Squirrel cage induction motor

50 Hz: separate start and run capacitor

60 Hz: combined start and run capacitor

Insulation class: F (IEC 85)

Motor protection

1-phase: Temperature guard with a thermal contact in stator opening temperature 135°C (275°F)

Cable

1-phase: 3G1mm², 10 m (33 ft) / 16AWG/3, 50 ft

Limitations

Max. submersion depth: 10 m (33 ft)

Max. liquid temperature: 40 °C (104 °F)

Allowed pH range: 5 - 8

Maximum liquid density: 1100 kg/m³ (68 lbs/ft³)

Shaft seals

Double mechanical seals running in an oil compartment

Material lower seal: *silicon carbide - silicon carbide*

Material upper seal: *carbon - aluminum oxide*

Bearings

Ball bearings with C3-clearance

Discharge connection

2" hose, BSP or NPSM

Materials

Pump top: *Aluminium*

Outer casing: *Aluminium*

Stator housing: *Aluminium*

Motor shaft: *Stainless steel*

Impeller: *Polyurethane*

Diffuser: *Polyurethane*

Screws and nuts: *Stainless steel*

Accessories

Float switch

Low suction collar

Pump raft



Hoogeindsestraat 5
 NL - 5447 PD Rijkevoort
 Nederland
 T : +31 (0) 485 - 371318
 F : +31 (0) 485 - 371918
 info@pompentechniek.nl
 www.pompentechniek.nl