


CD140M Dri-Prime® Pump

CD140M

The Godwin Dri-Prime® CD140M pump is an extremely powerful yet compact pump with flow capabilities to 281 m³/hr and discharge heads to 81 metres.

The CD140M features the unique Godwin high pressure oil bath mechanical seal design. This allows for dry running for prolonged periods while automatically priming and repriming. Able to perform in the toughest conditions, the CD140M can handle solids up to 75 mm in diameter. This makes it an extremely effective pump, suitable for both slurry and clean water applications. The powerful CD140M has proven itself a pump of choice for sewage handling, dewatering, local authority usage and many other applications.

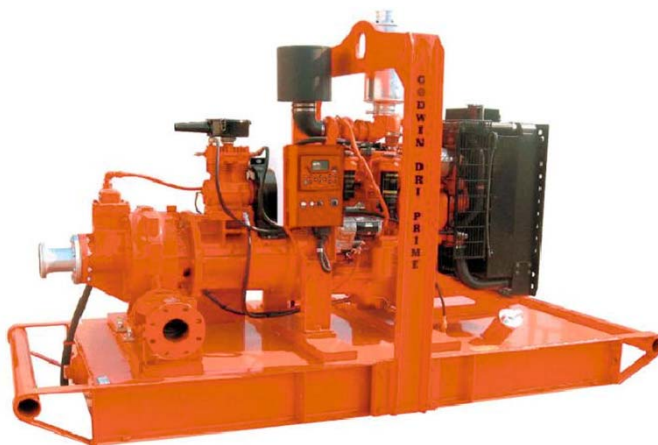

Features

- Fully automatic priming from dry to 8.5 metres suction lift.
- Godwin Dri-Prime® is a continuously operated Venturi air ejector priming device which requires no periodic adjustment or control.
- Extensive application flexibility. It will handle sewage, slurries and liquids with solids up to 75 mm in diameter.
- Dry-running high pressure oil bath mechanical seal, with high abrasion resistant silicon carbide faces.
- A Close-coupled centrifugal pump with Godwin Dri-Prime® system mounted to a diesel engine or electric drive.
- All cast iron construction (stainless steel construction option available) with cast steel impeller.
- Also available as hushpac or as a bareshaft pumpend.
- Standard engine Perkins 1104D-E44TA. Also available with Perkins 1104D-44TA


Specifications

Suction connection	100 mm (4" BS10 Table 'D')
Delivery connection	100 mm (4" BS10 Table 'D')
Max capacity	281 m ³ /hr
Max Head	81 metres
Max Solids handling	75 mm
Max Impeller diameter	345 mm
Max operating temp	80 °C
Max working pressure	8.5 bar
Max suction pressure	4.0 bar
Max casing pressure	12.8 bar
Max operating speed	2000 rpm



Hoogeindsestraat 5
NL - 5447 PD Rijkevoort
Nederland
T : +31 (0) 485 - 371318
F : +31 (0) 485 - 371918
info@pompentechniek.nl
www.pompentechniek.nl

Performance Curve

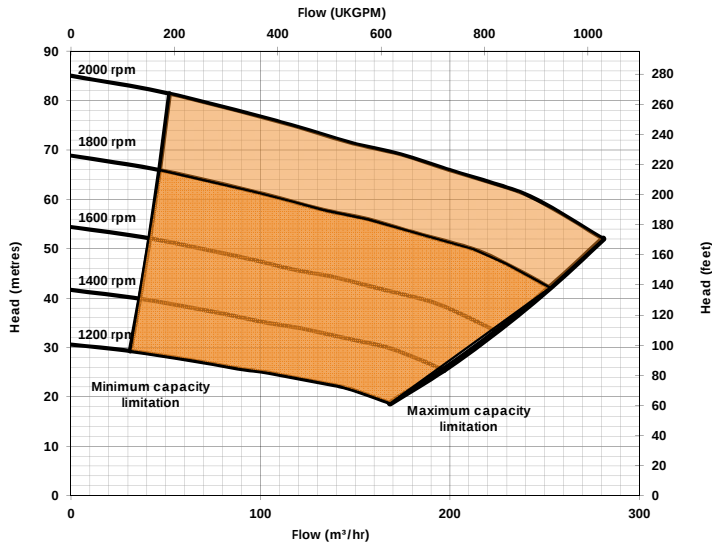

Materials

Pump casing & suction cover	Cast iron BS1452:1990 Grade 220
Wearplates	Cast iron to BS1452 Gr220
Pump Shaft	Carbon steel BS970 080M40
Impeller	Cast Steel BS3100 A5 Hardness to 200 HB Brinell
Non-return Valve body	Cast Iron BS1452 Grade 220
Mechanical Seal Faces	Silicon carbide vs silicon carbide viton

CD140M

Engine option 1

Perkins, 1104D-E44TA, 74.1 kW @ 2000 rpm

Impeller diameter 345 mm

Suction Lift Table

Total Suction Head (metres)	Total Delivery Head (metres)				
	43	49	56	62	72
Output (m³/hr)					
3.0	283	276	250	200	111
4.6	283	267	233	183	89
6.1	222	206	189	160	67
7.6	172	171	161	139	44

Fuel capacity (Full) 390 litres, (Usable) 318 litres

Fuel consumption @ 2000 rpm BEP 17 litres/hour

Weight: (Dry) 1,727 kg, (Wet) 2,060 kg

Dimensions: (L) 2,500 x (W) 1,300 x (H) 1,900 mm

Engine option 2

Perkins, 1104D-44TA, 60.5 kW @ 1800 rpm

Impeller diameter 345 mm

Suction Lift Table


Total Suction Head (metres)	Total Delivery Head (metres)				
	35	40	45	50	58
Output (m³/hr)					
3.0	255	248	225	180	100
4.6	255	240	210	165	80
6.1	200	185	170	144	60
7.6	155	154	145	125	40

Fuel capacity (Full) 390 litres, (Usable) 318 litres


Fuel consumption @ 1800 rpm BEP 15 litres/hour

Weight: (Dry) 1,800 kg, (Wet) 2,131 kg

Dimensions: (L) 2,500 x (W) 1,300 x (H) 1,900 mm

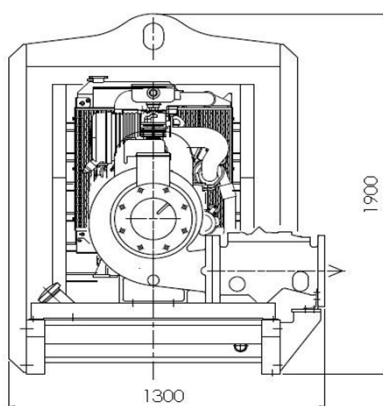

CD140M - PERKINS 1104D-44TA

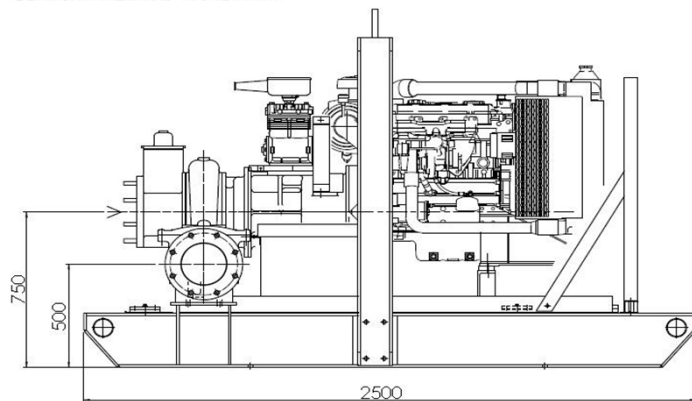

Performance data provided in tables is based on water tests at sea level and 20°C ambient.

All information is approximate and for general guidance only.

Please contact the factory or office for further details.

godwin 
a xylem brand



Specifications and illustrations are subject to revision without notice. Xylem Dewatering Solutions is not liable for any incompleteness or inaccuracies. Xylem Dewatering Solutions is not liable for any consequential, incidental or indirect damages relating to these specifications or their use.

Assessed to ISO 9001:2008
Certificate N° 1027