

ÚÖÚËÖVÁ^!ãÁ  
 ] ^!ãæç&@Á [ { ]


ÁV^&@ã&@Á] ^&ãæç•

Type	Max Flow			Max pressure		Max freq. Imp/min	ml o cc per pulse	Net weight		Dimension					
	l/h	l/min	US gal/h	bar	psig			kg	lb	height mm	width in	depth mm			
01-05	1	16.7	0.26	5	71.0	100	0.16	2.3	5.06	150	5.85	108	4.21	110	4.29
02-03	2	33.3	0.52	3	42.6	100	0.33	2.3	5.06	163	6.36	108	4.21	110	4.29
04-01	4	66.7	1.04	1	14.2	100	0.66	2.3	5.06	163	6.36	108	4.21	110	4.29

Liquid Ends Material

- FILTER: Stainless Steel
- SUCTION HOSE: PVC "crystal"
- DISCHARGE HOSE: polyethylene
- NIPPLES: polypropylene
- PUMP HEAD: polypropylene
- "LIP" VALVE: Dutral® (upon request Viton®)
- DIAPHRAGM: Teflon®
- DIAPHRAGM "O" RING SEAL: Dutral® (upon request Viton®)
- INJECTION VALVE FITTING: polypropylene

Typical Installation: single tank dishwasher with one solenoid

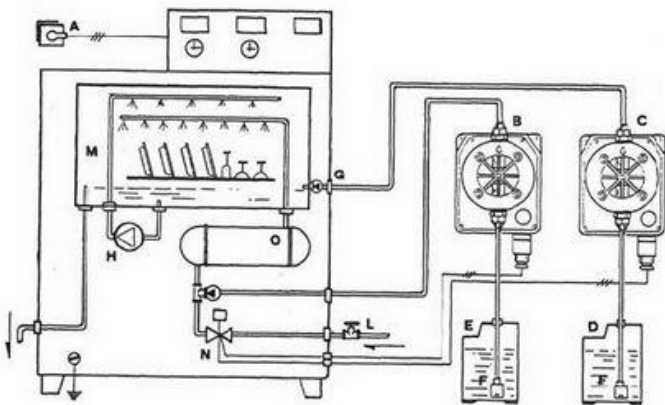

A. Power plug	E. Brightener tank	L. Drain pipe
B. Brightener pump	F. Filter	M. Drum
C. Detergent pump	G. Injection valve	N. Loading electro-valve
D. Detergent tank	H. Water pump	O. Boiler