




VENUS 500 - 700 - 1000

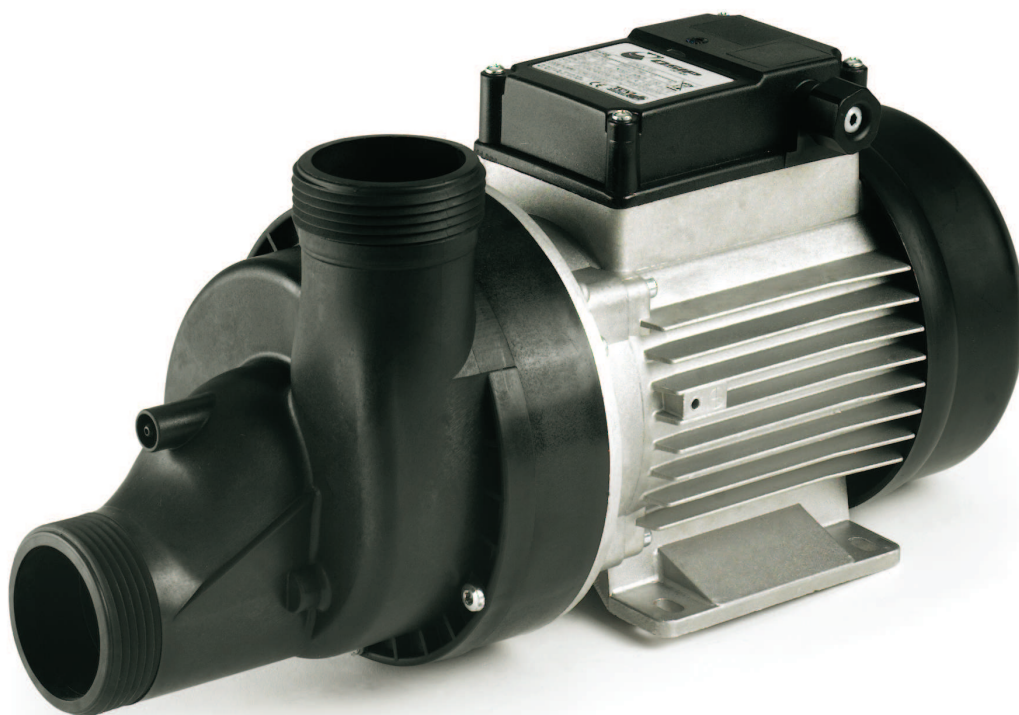

TIPO:

Elettropompa centrifuga ad alta portata costruita in materiale termoplastico.

UTILIZZO CONSIGLIATO:

Prodotto specifico per vasche idromassaggio.

TEMPERATURE MAX DI UTILIZZO:

35 °C (acqua), 40 °C (ambiente).



TYPE:

High flow centrifugal electric pump made of thermoplastic material.

SUGGESTED APPLICATIONS:

Product specifically designed for whirlpool baths.

MAX OPERATING TEMPERATURES:

35 °C / 95 °F (water), 40 °C / 104 °F (environment).



TYPOLOGIE:

Électropompe centrifuge d'un débit élevé construite en matériel thermoplastique.

USAGE CONSEILLÉ:

Produit spécifique pour baignoires hydromassage.


TEMPERATURES MAX D'UTILISATION:

35 °C (eau), 40 °C (environnement).



CARATTERISTICHE COSTRUTTIVE - CONSTRUCTION FEATURES - CARACTERISTIQUE DE CONSTRUCTION

Corpo pompa - Pump body - Corps de pompe	Polipropilene	Polypropilene	PP30VF
Supporto motore - Motor racket - Support moteur	Alluminio	Aluminium	Aluminium
Girante - Impeller - Turbine	Noryl®	Noryl®	Noryl®
Tenute meccaniche - Mechanical seal Tenues d'étanchéité	Allumina carbon grafite	Alumina carbon graphite	Alumina charbon graphite
Classe isolamento - Insulation class - Classe d'isolation	F	F	F
Classe di protezione - Protection class - Classe de protection	IPX5	IPX5	IPX5


Pump model	Hp (P2)	Kw (P2)	A ~ 1 230V 50 Hz	μF	Q l/min Q m³/h	0	50	100	150	200	250	300
VENUS 500	0,50	0,37	2,2	8	H/m	7,8	6,7	5,5	4,3	3	1,5	-
VENUS 700	0,70	0,52	2,8	12		10	8,9	7,8	6,2	5,1	3,3	1,5
VENUS 1000	0,90	0,67	3,7	12		10,7	9,8	8,8	7,8	6,7	5,2	3,5

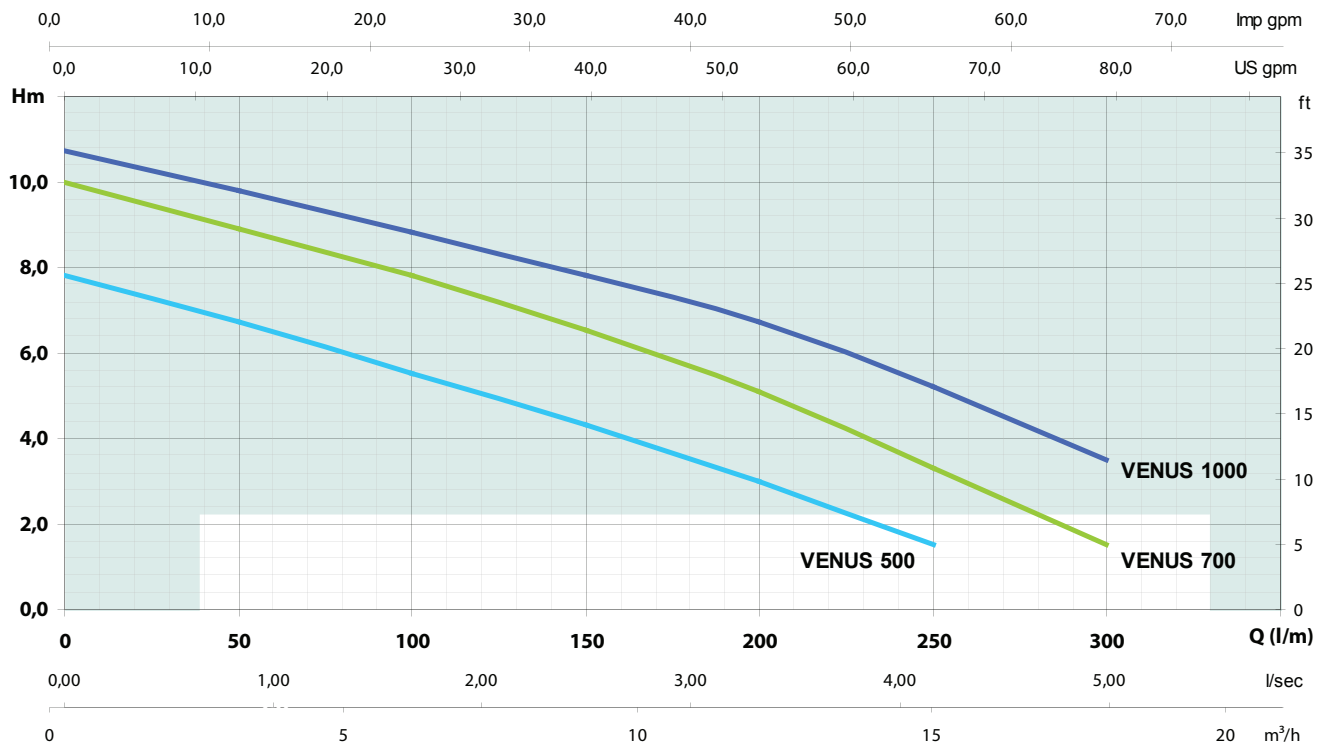

Pump model	A	B	C	D	E	F	G	H	I	L	M	N	O	Weight kg / lbs
VENUS 500	119	99	28	169	63	68	80	200	348	157	101	6,2	14	4,5 / 9,92
VENUS 700	119	99	28	169	63	68	80	200	348	157	101	6,2	14	6,0 / 13,23
VENUS 1000	119	99	28	169	63	68	80	200	348	157	101	6,2	14	6,5 / 14,33

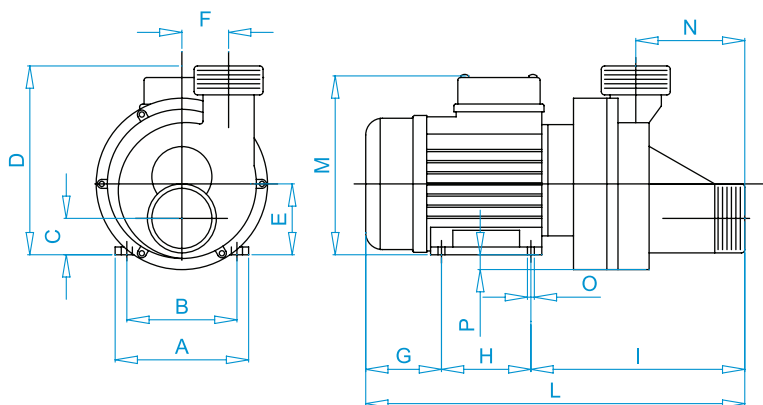

Pump model	H	X	Y	Q
VENUS	160	80	120	72



Pump model	H	X	Y	Q
VENUS	100	83	113	60