

Horizontal End-Suction Pumps


SBA430S...433S

Axial/semi-open impellers



60 Hz

SBA430S...433S

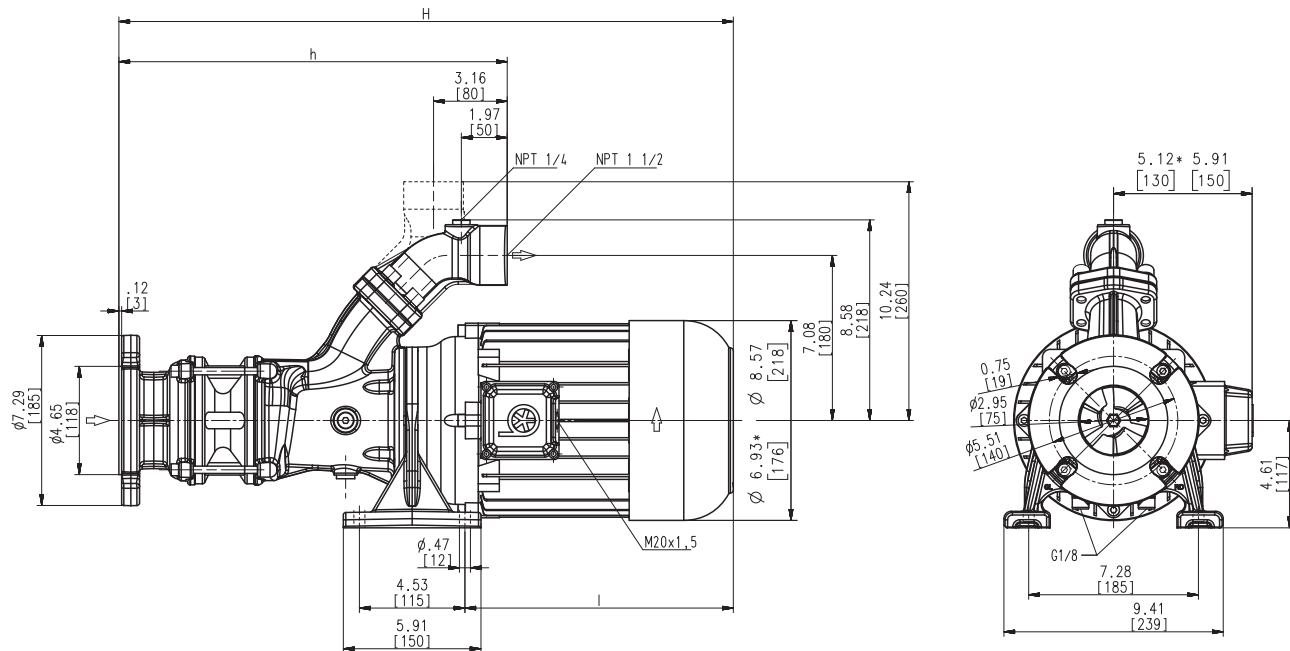

Dimensions in Inches / mm

*) Dimensions SBA430S

Type	Flow at head	Dimensions		Length		Weight		Power	Voltage 3 ~	Fre- quen- cy	Current	Speed
	GPM /Feet l/min /m	H inch	H mm	h inch	h mm	l Inch	l mm	HP kW	V	Hz	AMPS	RPM
SBA430S	100/38	22.4	569	14.1	359	10.1	256	2.6	230	60	7.0	3480
	400/11							1.95	460	60	3.5	3480
SBA432S	100/82	27.8	705	16.7	423	12.9	328	5.1	230	60	12.8	3520
	400/24							3.8	460	60	6.4	3520
SBA433S	100/118	30.3	769	19.2	487	14.1	358	7.7	230	60	19.0	3520
	400/34							5.75	460	60	9.5	3520




Horizontal End-Suction Pumps

are centrifugal inline pumps with a compact design where the impeller is mounted onto the extended motor shaft.

These pumps are not self-priming and must be gravity fed. All pumps are equipped with a single mechanical seal.

Upon request a second mechanical seal is available to allow for dry-running (-GD).

This pump series is designed for horizontal installations next to a tank and for pumping **air entrained coolant** fluids, such as **water-soluble coolants or cutting oils**, as they occur in **high speed turning, milling or grinding applications**.

The SBA pumps are equipped with the user-friendly **SAE flange** connection which allows for either vertical or horizontal pipe connection and the connection of a pressure gauge with NPT 1/4.

For more information see mechanical features within the technical information section.

Applications

Types of fluid
coolants
cooling/cutting oils
Kinematic viscosity
...200 SSU (...45 mm ² /s)
Pumping temperature
30...175 °F (0...80 °C)

Construction

Pump body	cast iron
Cover	cast iron
Impeller axial	cast steel
Impeller radial	cast steel
Shaft	steel
Mechanical seal	SiC
Noise level	
SBA430S	66 dBA
SBA432S...SBA433S	73 dBA

