

Lifting Pumps

TAA140...280


Axial impellers



Hoogeindsestraat 5
NL - 5447 PD Rijkevoort
Nederland
T : +31 (0) 485 - 371318
F : +31 (0) 485 - 371918



TAA140, 280

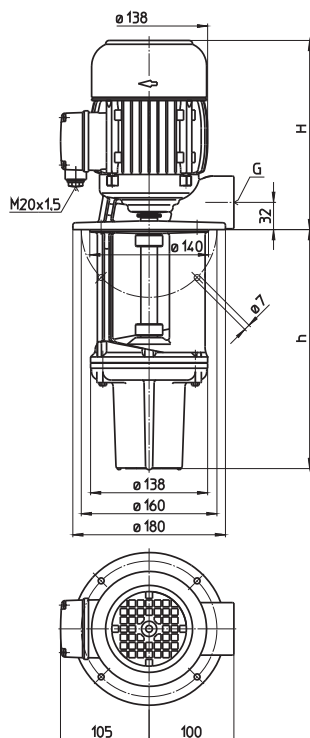

Type	Vol. del. at manom. del. head l/min / m	Height H mm	Depth of im- mersion h mm	Pipe con- nection	Weight kg	Power kW	Voltage 3 ~ V	Fre- quen- cy Hz	Current A	Speed 1/min
TAA140/200	180/2	223	200	G 1 ¼	15	0.42	220-240	50	1.4	2800
280			280		16		380-420	50	0.8	2800
350			350		17		460	60	0.8	3300
TAA280/200	360/2	264	200	G 1 ½	17	0.92	220-240	50	3.8	2840
280			280		18		380-415	50	2.2	2840
350			350		19	1.06	460	60	2.1	3440

Lifting Pumps

series TAA gently pump **foam-sensitive cooling** lubricants (emulsions or cooling and cutting oils) or highly inflated cooling lubricants such as occur with a high degree of machining in lathing, milling or grinding.

Applications

Types of fluid
coolants
cooling/cutting oils
Kinematic viscosity
...45 mm²/s (45 cSt)
Pumping temperature
0...60° C

Construction

Pump body	cast iron
Cover	cast iron
Impellers	cast iron
Shaft	steel
Noise level TAA140...TAA280	62 dBA

