



DESLUBE



Hoogeindsestraat 5
 NL - 5447 PD Rijkevoort
 Nederland
 T : +31 (0) 485 - 371318
 F : +31 (0) 485 - 371918
 info@pompentechniek.nl
 www.pompentechniek.nl

- Submerged Lubrication Oil Pump

- Low NPSH
- Low noise or vibrations
- Low maintenance costs
- High reliability
- High flexibility

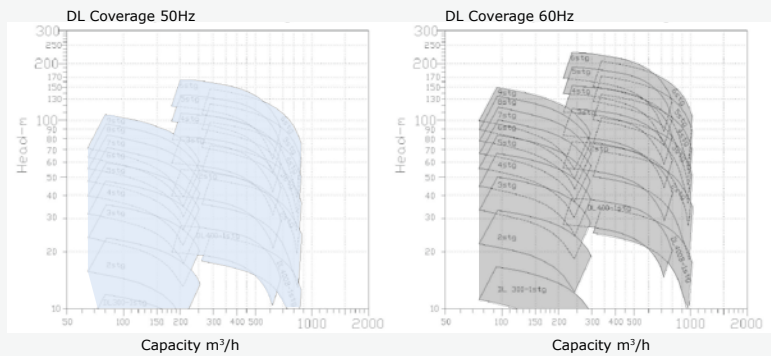

The DESLUBE series is a submerged deep well pump designed for Main Engine Lubrication oil supply for especially large two-stroke engines.

The design is based on our long time experience of manufacturing deep-well pumps as well as the design features from our in-line centrifugal series. The pump is placed in the tank sump supported by dome flange and requires no further suspension. The sturdy construction ensures a reliable operation with low noise and vibrations level.

DESLUBE combine the advantage of good suction ability with the nature of the centrifugal pump to adopt the system pressure fluctuations. If the lube oil pressure is dropping, a DESLUBE pump will increase the flow to reduce the risk of severe damage and eventually break down on the main engine.

Material specification

Material combination	
Pump casing	Cast iron
Impeller	Bronze
Wear ring	Bronze
Discharge socket	Ductile cast iron
Shaft	Stainless steel
Mech. shaft seal	Carbon/Ceramic

Capacity range:
 80 - 1000 m³/h
 350 - 4400 US gpm

Head:
 30 - 200 mlc
 100 - 330 ft

